

P1 1196604

REC'D 26 JUL 2004

WIPO

PCT

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE
United States Patent and Trademark Office

July 21, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/476,978

FILING DATE: June 09, 2003

RELATED PCT APPLICATION NUMBER: PCT/US04/18074

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS



M. Tarver

M. TARVER
Certifying Officer

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

16138 U.S. PTO
06/09/03

06-10-03
Approved for use through 10/31/2002. OMB 0651-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53(c).

Express Mail Label No. EU057923841US

INVENTOR(S)				
Given Name (first and middle [if any])	Family Name or Surname	Residence (City and either State or Foreign Country)		
Peter David Jonathan Ashley Stephen John	Armstrong Brinson Dboney	Laleston, Brigend, Wales, UK Crestwood, KY, USA St. Arvans, Chepstow, Gwent		
<input checked="" type="checkbox"/> 4 Additional inventors are being named on the <u>1</u> separately numbered sheets attached hereto				
TITLE OF THE INVENTION (500 characters max)				
MAGNETIC SEPARATOR APPARATUS				
Direct all correspondence to:				
CORRESPONDENCE ADDRESS				
<input checked="" type="checkbox"/> Customer Number	008131		Place Customer Number Bar Code Label here	
OR				
<input type="checkbox"/> Firm or Individual Name				
Address				
Address				
City		State		ZIP
Country		Telephone		Fax
ENCLOSED APPLICATION PARTS (check all that apply)				
<input checked="" type="checkbox"/> Specification Number of Pages	33	<input type="checkbox"/> CD(s), Number		
<input checked="" type="checkbox"/> Drawing(s) Number of Sheets	10	<input type="checkbox"/> Other (specify)		
<input checked="" type="checkbox"/> Application Data Sheet. See 37 CFR 1.76				
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT				
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27.			FILING FEE AMOUNT (\$)	
<input type="checkbox"/> A check or money order is enclosed to cover the filing fees				
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:	13-2492			160.00
<input type="checkbox"/> Payment by credit card. Form PTO-2038 is attached.				
The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.				
<input checked="" type="checkbox"/> No.				
<input type="checkbox"/> Yes, the name of the U.S. Government agency and the Government contract number are:				

Respectfully submitted

SIGNATURE

Robert L. McKellar

Date

06/09/03

TYPED or PRINTED NAME

Robert L. McKellar

REGISTRATION NO.

(if appropriate)

Docket Number:

26,002

TELEPHONE

(989) 631-4551

DC-5067P

USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

PROVISIONAL APPLICATION COVER SHEET

Additional Page

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Approved for use through 10/31/2002. OMB 0851-0032
U.S. Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Docket Number		DC - 5067P
INVENTOR(S)/APPLICANT(S)		
Given Name (first and middle (if any))	Family or Surname	Residence (City and either State or Foreign Country)
Stephen Paul Frank Edward David William	Fawell Genner Perrin Snodgrass	Cardiff, Wales, UK New Bethel, Pontlanfraith, Gwent, UK Barry, Wales, UK Madison, IN, USA

Number 2 of 2

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

APPLICATION DATA SHEET

APPLICATION TYPE:

SUBJECT MATTER:

TITLE:

ATTORNEY DOCKET NUMBER:

SUGGESTED DRAWING FIGURE:

TOTAL DRAWING SHEETS:

SMALL ENTITY:

APPLICANT INFORMATION

APPLICANT AUTHORITY TYPE:

PRIMARY CITIZENSHIP/COUNTRY:

GIVEN NAME:

MIDDLE NAME:

FAMILY NAME:

CITY OF RESIDENCE:

STATE OF RESIDENCE:

COUNTRY OF RESIDENCE:

STREET MAILING ADDRESS:

CITY OF MAILING ADDRESS:

STATE:

COUNTRY:

ZIP CODE:

APPLICANT INFORMATION

APPLICANT AUTHORITY TYPE:

PRIMARY CITIZENSHIP/COUNTRY:

GIVEN NAME:

MIDDLE NAME:

FAMILY NAME:

CITY OF RESIDENCE:

STATE OF RESIDENCE:

COUNTRY OF RESIDENCE:

APPLICATION INFORMATION

Provisional

UtilityC SEPARATOR APPARATUS

MAGNETIC SEPARATOR APPARATUS

DC - 5067P

Figure 1

10

NO

Inventor

British

Peter

David

Armstrong

Bridgend

Wales

UK

3 High Street, Laleston

Mid Glamorgan

Wales

UK

CF320LD

Inventor

US

Jonathan

Ashley

Brinson

Crestwood

Kentucky

US

STREET MAILING ADDRESS: 7404 Cambridge Drive
CITY OF MAILING ADDRESS: Crestwood,
STATE: Kentucky
COUNTRY: US
ZIP CODE: 40014

CORRESPONDENCE INFORMATION

CUSTOMER NUMBER: 008131
NAME: Robert L. McKellar
STREET: 784 South Poseyville
CITY: Midland
STATE: Michigan
COUNTRY: US
ZIP CODE: 48640
PHONE NUMBER: (989) 631-4551
FAX NUMBER: (989) 631-4584
E-MAIL ADDRESS: RLMCKELLAR@MSH-IPLAW.com

REPRESENTATIVE INFORMATION

REPRESENTATIVE CUSTOMER NUMBER 008131

ASSIGNMENT INFORMATION

ASSIGNEE NAME:
MAILING ADDRESS

STREET:
CITY:
STATE:
ZIP CODE:
COUNTRY:

APPLICANT INFORMATION

APPLICANT AUTHORITY TYPE:	inventor
PRIMARY CITIZENSHIP/COUNTRY:	British
GIVEN NAME:	Stephen
MIDDLE NAME:	John
FAMILY NAME:	Dobney
CITY OF RESIDENCE:	Gwent
STATE OF RESIDENCE:	Wales
COUNTRY OF RESIDENCE:	UK
STREET MAILING ADDRESS:	27 Grange Park, St. Arvans
CITY OF MAILING ADDRESS:	Gwent
STATE:	Chepstow
COUNTRY:	Wales
ZIP CODE:	MP16 6EA

APPLICANT INFORMATION

APPLICANT AUTHORITY TYPE:	Inventor
PRIMARY CITIZENSHIP/COUNTRY:	British
GIVEN NAME:	Stephen
MIDDLE NAME:	
FAMILY NAME:	Fawell
CITY OF RESIDENCE:	Cardiff
STATE OF RESIDENCE:	Wales
COUNTRY OF RESIDENCE:	UK
STREET MAILING ADDRESS:	53 Parc Castell-y-Mynach
CITY OF MAILING ADDRESS:	Cardiff
STATE:	Wales
COUNTRY:	UK
ZIP CODE:	CF15 9NW

APPLICANT INFORMATION

APPLICANT AUTHORITY TYPE:	Inventor
PRIMARY CITIZENSHIP/COUNTRY:	British
GIVEN NAME:	Paul
MIDDLE NAME:	
FAMILY NAME:	Genner
CITY OF RESIDENCE:	Gwent
STATE OF RESIDENCE:	Wales
COUNTRY OF RESIDENCE:	UK
STREET MAILING ADDRESS:	Luxtree, New Bethel, Pontllanfraith
CITY OF MAILING ADDRESS:	Gwent
STATE:	Wales
COUNTRY:	UK
ZIP CODE:	NP12 2BA

APPLICANT INFORMATION

APPLICANT AUTHORITY TYPE:	Inventor
PRIMARY CITIZENSHIP/COUNTRY:	British
GIVEN NAME:	Frank
MIDDLE NAME:	Edward
FAMILY NAME:	Perrin
CITY OF RESIDENCE:	Barry
STATE OF RESIDENCE:	Wales
COUNTRY OF RESIDENCE:	UK
STREET MAILING ADDRESS:	9 White House, Cold Knap Way
CITY OF MAILING ADDRESS:	Barry
STATE:	Wales
COUNTRY:	UK
ZIP CODE:	CF62 6FB

APPLICANT INFORMATION

APPLICANT AUTHORITY TYPE:	Inventor
PRIMARY CITIZENSHIP/COUNTRY:	IS
GIVEN NAME:	David
MIDDLE NAME:	William
FAMILY NAME:	Snodgrass
CITY OF RESIDENCE:	Madison
STATE OF RESIDENCE:	Indiana
COUNTRY OF RESIDENCE:	US
STREET MAILING ADDRESS:	609 East Second St.
CITY OF MAILING ADDRESS:	Madison
STATE:	Indiana:
COUNTRY:	US
ZIP CODE:	47250-3636

MAGNETIC SEPARATOR APPARATUS

What is disclosed and claimed herein are magnetic separator devices that are useful in separating finely divided solids, liquids, vapors, and gases that are hazardous, that is, they may be corrosive, flammable, toxic, or a combination of such hazards and the use of such devices in the manufacture of chlorosilanes.

BACKGROUND OF THE INVENTION

Magnetic separation is well described in the literature. Jan Svoboda has reviewed the state of magnetic separation technology in "Magnetic Methods for the Treatment of Minerals", Developments in Mineral Processing - 8, ISBN0-44-42811-9, Elsevier, New York, 1987. Other general references include "Magnetic Separation", Perry's Chemical Engineers' Handbook, McGraw-Hill, New York, 7th Edition, 1998, pp. 19-49 and John Oberteuffer and Ional Wechsler, "Magnetic Separation", Kirk-Othmer Encyclopedia of Chemical Technology, 3rd edition, 1978, John Wiley & Sons, New York, Volume 15, pp. 708-732.

Several patents have issued dealing with vibrating matrix separators, namely, Frantz, in U.S. Patent 2,074,085, that issued March 16, 1937 describes a magnetic separator for fine powders. Frantz disclosed that separators based on the use of pulleys, rotors or belts are unable to make efficient separations when fed fine powders. Frantz's magnetic separator consists of an electromagnetic solenoid, a casing vessel and attractor screens as the matrix. In one embodiment of the invention, the matrix is vibrated by means of an eccentric weight fixed to a vertical shaft that is rotated by a motor.

Mechanical means is not the only method of vibrating the matrix; it is also possible by electromagnetic means. Kolm discloses in U.S. Patent 3,567,026 that issued March 2, 1971 and U.S. Patent 3,676,337 that issued July 11, 1972 the vibration of a fine steel wool matrix in a direct current solenoid separator using alternating current coils. Both Kolm patents describe a magnetic separator that includes one direct current coil and three alternating current coils. The direct current coil provides the background magnetic field that magnetizes the steel wool matrix to perform the main separation. The first alternating current coil is a demagnetizing coil to remove residual magnetization from the direct current coil. The other two alternating current coils create an eddy current to vibrate the steel wool matrix to shake loose retained components. A process is claimed

for switching off the direct current field and applying the alternating current fields to flush magnetic fines out of the matrix. In addition to ferromagnetic wool, copper wool is optionally added to intensify the vibration. The eddy current is in the upper sonic range on the order of 18,000 to 20,000 cycles per second, and up. Perforated plates can
5 optionally be used for flow distribution.

Although the Kolm patents are chiefly concerned with wet slurries, dry particulate removal is also contemplated from a stream such as fly ash contained in smoke from a power station.

Oder, in U.S. Patent 4,087,358, that issued May 2, 1978 describes methods and
10 apparatus for vibrating the matrix of a clay slurry magnetic separator to dislodge impurities during the flushing step of the operation. Vibratory hammering, shaking the matrix by auxiliary alternating current coils, and the use of high intensity sound, are suggested means of applying auxiliary mechanical forces to the matrix.

Wulff, in U.S. Patent 2,372,665, that issued March 20, 1945 describes a method
15 of separating white cast iron powder into pearlite-rich and carbide-rich fractions by heating the mixed feed to 215°C so that the carbide particles are above their Curie temperature and therefore not attracted to the magnetic field.

Collin in U.S. Patent 4,000,060 that issued December 28, 1976 describes a
20 magnetic separator for hot powder mixtures. The separator consists of a drum roll separator with water-cooled permanent magnets. The non-magnetic rollers are set in a temperature controlled fluidized bed. The feed powder is fluidized with an inert gas such as nitrogen.

Inoue in U.S. Patent 4,836,914, that issued June 6, 1989, describes a process using
25 a magnetic separator to remove iron particles from petroleum oil. The preferred temperature of operation is up to 400°C. This method has advantages over other treatment alternatives such as hydroxide treatment. It is especially advantageous for high viscosity oils.

Sometimes it is desirable to heat the matrix to aid in cleaning it between cycles. Dijkuis in U.S. Patent 4,353,730 that issued on October 5, 1982 describes a method for
30 cleaning a magnetic separator matrix by heating a cleaning fluid above the Curie temperature of the matrix material in order to release magnetic fines.

There is disclosed an example of magnetic separation involving particles that are abrasive in U.S. Patent 6,262,843, that issued on July 24, 2001 to Wiesner in which it is taught how to remove impurities from the machining of semiconductor material wherein particles from saw blades or lapping plates can be magnetically separated from the cutting fluid used during the machining process for silicon.

Hazardous powders are those finely divided solids that are corrosive, flammable, toxic, or a combination of such hazards. Powders that are inherently hazardous must be completely contained inside the magnetic separator apparatus with a highly reliable leakage prevention design. Sometimes, hazardous dry powders are processed simultaneously with hazardous gases, vapors, or liquids. The hazardous fluids also contribute to the difficulty of operating a magnetic separator on such powders.

Confining such materials within the separator is very important. Small leaks of corrosive materials can result in corrosion failures of the containment vessel that lead to large, even catastrophic leaks. Corrosive and toxic materials can injure employees. Flammable materials can cause fires and explosions when they leak from a contained, inert environment to the atmosphere. Thus, the integrity and reliability of the containment system is very critical.

Additional problems are introduced when the separation is made at higher than ambient temperatures, higher than ambient pressures or when the solids are especially abrasive. High temperature operations make it impossible to use many polymer or elastomer materials that are available at lower temperatures. These materials might be the preferred material of construction for corrosion or abrasion resistance properties. At high temperatures, many polymers and elastomers are seriously weakened and thus fail in operation.

Pressure adds to this problem if the materials of construction are used for pressure containment or sealing. Loss of containment during operation above ambient pressure permits rapid leakage of process materials out of the separator to the atmosphere, thus creating a hazardous incident such as a fire or explosion. Similar hazards can be created inside the separator if it operates at vacuum so that air is drawn into the device on loss of

containment. In addition to hazardous consequences on loss of containment, quality problems might also result on a process. An example would be a process where oxygen is in containment and the magnetic separator is operating under vacuum.

5 Abrasion of materials of construction of the apparatus is also a problem. The containment vessel can be eroded resulting in loss of containment. Seals are especially prone to containment failure, so avoidance of rotating mechanical seal faces or similar design features is critical. Detection of failures is also highly desirable.

10 There are many types of magnetic separators in industrial today. Several types of high gradient magnetic separators are known to the inventors herein. One is an enclosed belt separator including the MagnaCat® separator manufactured by Merrichem Company, located in Houston, Texas.

15 In U.S. Patent 4,406,773, Hettinger et al. describe the use of a Sala high gradient carousel magnetic separator to separate samples of catalyst mixed with water. It is presumed that this separation of the slurry is made near ambient temperature. In U.S. Patent 5,147,527, Hettinger describes the use of a belt roller magnetic separator, especially the Eriez Magnetic Rare Earth Roll Permanent Magnetic Separator fitted with an electrostatically conductive belt. Separation is contrasted with an Eriez high gradient magnetic separator, but throughput of the high gradient magnetic separator was limited. In U.S. Patent 5,190,635, a preferred process is described wherein the catalyst magnetic susceptibility and Curie temperature are controlled by processing conditions. In U.S. Patent 5,985,134, a preferred separation temperature of up to 260°C is stated. In U.S. 5,972,208 and 6,059,959, the optional use of a catalyst cooler is described to reduce the catalyst temperature from preferred regenerator temperature of about 700°C to a cooled temperature of 38°C to 260°C. Goolsby and Kowalczyk in EP 0951940 A2 disclose a preferred samarium/cobalt magnet to allow efficient operation up to 232°C (450°F) "without extensive cooling equipment".

20 Another modern version of the catalyst separator has been developed by Nippon Oil Company. Ushio and co-workers in U.S. Patent 4,359,379 that issued November 16, 1982 describes magnetic separation of the catalyst using a Sala high gradient magnetic separator with a ferromagnetic matrix. As noted therein, the inventors note that the drum-type magnetic separator can remove iron dust, but is "useless" in separating the metal

25

30

deposited catalyst. In some examples, air is used as a carrier fluid in the high gradient magnetic separator. There is no indication therein that the separations were made at high temperature, and one example shows operation at room temperature. Ino and co-workers in U.S. Patent 5,520,797 that issued on May 28, 1996 also used a Sala high gradient
5 magnetic separator with a ferromagnetic matrix and gas carrier. These devices have problems that limit their effectiveness and usefulness for magnetically separating hazardous dry powders.

The belt separator device can be enclosed in a pressure tight (or nearly pressure tight) containment vessel. Such a device is described in the U.S. Patents to Hettinger,
10 Goolsby and co-workers. Such devices are presently marketed under the trade name of MagnaCat to separate fluidized catalytic cracker catalysts. The belt separator has certain disadvantages. Since the feed powder lies on a belt during the separation processing, particle-to-particle attraction forces interfere with the magnetic attraction forces. Therefore, particle cohesion and static electricity can make magnetic and non-magnetic
15 particles stick to each other. When this happens, it is difficult to separate the particles into magnetic and non-magnetic streams. Another problem with such devices is belt wear. When the belt wears due to degradation, corrosion, abrasion or stretching, it must be replaced. This is especially difficult if the process is hazardous. In addition to natural particle attractions, the belt can actually increase particle-to-particle forces. Static
20 electricity can build up on a rotating belt device, especially if the belt is a non-conducting elastomer. As indicated *Supra*, the belt separator can be enclosed in a containment vessel.

Another type of separator is the matrix/canister high gradient magnetic separator. Due to its matrix construction, this separator has intense local magnetic gradients that improve separation. By vibrating the device, particle-to-particle interactions are
25 minimized. One method used to vibrate the device is to connect the canister with a flexible rubber boot around the full diameter of the canister. Such a rubber boot, however, is problematic with corrosive materials and hot, pressurized processing conditions. Operation of the device above ambient pressure is also difficult because the flexible boot tends to expand due to the internal pressure. This type of boot is also
30 difficult to make reliable because it is as large as the diameter of the canister. For a twelve inch canister, the boot must be a minimum of twelve inches in diameter. The

entire high gradient magnetic separator can be installed in a pressure tight container, but this adds to the capital expense of the equipment, and it adds to the complexity of maintenance operations.

5 The apparatus of the invention disclosed herein is a vibrating matrix, high gradient magnetic separator. It can process powders, vapors, liquids and gases that are corrosive, flammable or toxic. It permits operation at above ambient temperature and above ambient pressure. It is especially suitable for highly abrasive fine powders. It also provides for safe containment of process hazards.

The processes set forth herein are processes for manufacturing chlorosilanes.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a full front view of one embodiment of a separator of this invention sitting on a support stand.

Figure 2 is a full cross sectional view of the separator of Figure 1 through line A-A minus the support stand.

15

Figure 3A is an enlarged, detailed view of the area designated B on Figure 2.

Figure 3B is an enlarged view in perspective of the area C of Figure 3A showing the positioning of a circumferential coil spring around the shaft seal.

Figure 4 is a sectional view of a vibrator.

Figure 5 is a top view of the vibrator of Figure 4.

20

Figure 6 is a full front view of another embodiment of this invention which is a separator showing both the containment bellows and the balance bellows in position, with the feed tube from the balance bellows to the containment bellows.

Figure 7 is a cross sectional view of Figure 6 through the line E-E of Figure 6.

Figure 8 is a full view of the balance bellows of Figure 7, area D.

25

Figure 9 is a full view of the containment bellows of Figure 7, area E.

Figure 10 is an enlarged view of about $\frac{1}{2}$ of the balance bellows in area F of Figure 8.

30

THE INVENTION

What is disclosed and claimed herein is a vibrating magnetic separator having vibrating components and stationary components wherein the vibrating magnetic separator contains a flexible bellows to isolate the vibrating components from the stationary components

With further specificity, there is a vibrating magnetic separator comprising in combination an electromagnet; a pressure vessel having an inlet and an outlet, wherein the pressure vessel is mounted in the electromagnet such that the electromagnet essentially surrounds a portion of the pressure vessel; a ferromagnetic matrix; a vibrator for vibrating the ferromagnetic matrix wherein the vibrator move in a vertical direction and, a bellows that connects the stationary components of the magnetic separator to the vibrating components of the magnetic separator.

One embodiment of the invention disclosed and claimed herein is a magnetic separator apparatus comprising in combination a pressure vessel container having a top half, a lower half, and a lower half terminus. The pressure vessel container is surmounted by a pressure vessel lid flange and has a vertical wall. The pressure vessel lid flange has a centered opening through it wherein there is located a shaft seal.

There is at least one feed nozzle mounted on the pressure vessel container for feeding material to the pressure vessel container, and there is a matrix located in the lower half of the pressure vessel container, the matrix being supported in the pressure vessel container by shaft and matrix plate.

There is an electromagnetic apparatus encircling the pressure vessel container on the outside of the pressure vessel container wall and at the location of the matrix. In addition, there is a layer of thermal insulation located between the electromagnetic apparatus and the pressure vessel container wall to insulate the pressure vessel container.

A first support mechanism is mounted on the pressure vessel lid flange for supporting a vibrator mounting frame and the vibrator mounting frame has a centered opening through it. There is a second support mechanism surmounted on the vibrator mounting frame for supporting at least one lower control spring, wherein the second support mechanism also supports a magnet vibrator casing containing a magnet vibrator.

The magnet vibrator and magnet vibrator casing have centered openings through them to accommodate a unitary vertical shaft described infra.

Surmounted on the magnet vibrator casing is a third support mechanism and mounted on the third support mechanism is a support plate and surmounted thereon is a
5 fourth support mechanism. The fourth support mechanism has surmounted on it at least one upper control spring having an upper surface.

There is a unitary moveable vertical shaft having a lower end and an upper end and the unitary moveable vertical shaft is connected at its lower end to the matrix plate. The unitary moveable vertical shaft extends upwardly through the pressure vessel lid
10 flange centered opening and the shaft seal located in the pressure vessel lid flange and extends upwardly through the center of a bellows, and continues to extend upwardly through the vibrator mounting frame centered opening and continuing extending upwardly through the lower control spring, through the magnet vibrator centered opening
15 and then extending upwardly through the upper control spring and terminating at essentially the upper surface of the upper control spring.

There is a containment bellows surmounted on the pressure vessel lid flange and the bellows is supported by an upper support mechanism that surrounds the unitary moveable vertical shaft.

There is a clean gas purge apparatus comprising a clean gas purge inlet located in
20 the pressure vessel lid flange that opens into a purge space formed by the shaft seal as the floor, the pressure vessel lid flange as the side and the containment bellows as the top. The clean gas purge prevents dust from collecting between the convolutions of the bellows. It also prevents condensable liquids from collecting in the bellows if vapors are present. Thus, the clean gas purge prevents obstruction of the free movement of the
25 bellows. The clean gas can be any dirt-free gas. It can be an inert gas such as nitrogen. There is a small opening where the shaft seal meets the unitary vertical shaft to enable the inert gas to flow into the pressure vessel container.

The pressure vessel lid flange has mounted on the lower half terminus, a
30 discharge cone. The discharge cone has a lower end, there being mounted on the lower end, a discharge nozzle.

Another embodiment of the invention is a magnetic separator apparatus comprising a second bellows, which is a balance bellows. The magnetic separator of this embodiment is very similar to the first embodiment set forth above except for the balance bellows and the placement of the vibrating mechanism and the upper and lower control springs.

5 Thus, there is a pressure vessel container having a top half, a lower half, and a lower half terminus. The pressure vessel container is surmounted by a pressure vessel lid flange as in the first embodiment, and the pressure vessel container has a vertical wall. The pressure vessel lid flange has a centered opening through it and there is a shaft seal located in the centered opening.

10 There is at least one feed nozzle mounted on the pressure vessel container for feeding material to the pressure vessel container and depending partly on the material to be separated, there can be two or more such feed nozzles.

 As in the first embodiment, there is a matrix located in the lower half of the pressure vessel container. The matrix is supported in the pressure vessel container by a
15 matrix plate that is fixed to the shaft. There is an electromagnetic apparatus encircling the pressure vessel container on the outside of the pressure vessel container wall, and essentially at the location of the matrix as it is supported in the pressure vessel container. There is a layer of thermal insulation located between the electromagnetic apparatus and the pressure vessel container wall.

20 The pressure vessel lid flange has a first support mechanism mounted on it for supporting at least one lower control spring support mechanism and lower control spring above it. Also, there is a second support mechanism surmounted on the lower control spring support mechanism, wherein the second support mechanism supports a magnet vibrator casing containing a magnet vibrator.

25 The magnet vibrator and magnet vibrator casing have centered openings through them and there is surmounted on the magnet vibrator casing, a third support mechanism. There is mounted on the third support mechanism at least one upper control spring support mechanism and at least one upper control spring.

 As in the first embodiment, there is a containment bellows surmounted on the
30 pressure vessel lid flange that is supported by an upper support mechanism that surrounds a unitary moveable vertical shaft that is described infra.

The fourth support mechanism surmounted on the upper control spring support mechanism is surmounted by a top support plate, wherein the top support plate supports the balance bellows eluded-to *Supra*. The balance bellows is supported by a lower support mechanism that surrounds the unitary moveable vertical shaft.

5 The unitary moveable vertical shaft has a lower end and an upper end and the unitary moveable vertical shaft is held at its lower end by the matrix plate. Further, the unitary moveable vertical shaft extends upwardly through the pressure vessel lid flange centered opening and the shaft seal located in the pressure vessel lid flange, extends upwardly through the center of the containment bellows, extends upwardly through the
10 lower control spring and lower control spring support mechanism, extends upwardly through the magnet vibrator centered opening, extends upwardly through the upper control spring support mechanism and upper control spring, and extends upwardly through the balance bellows and terminates below the lower surface of the top support plate.

15 Located in the pressure vessel lid flange is an inert gas purge apparatus which purge opens into a purge space formed by the shaft seal as the floor, the pressure vessel lid flange as the side and the containment bellows as the top, there being a small opening where the shaft seal meets the unitary vertical shaft to enable the inert gas to flow into the pressure vessel container. In this embodiment, as opposed to the first embodiment, there
20 is a pressure balancing tube, the pressure balancing tube being openly connected from the containment bellows to the balance bellows.

In addition, the pressure vessel lid flange has mounted on the lower half terminus, a discharge cone, the discharge cone having a lower end, there being mounted on the lower end of the discharge cone, a controllable discharge nozzle.

25 A further embodiment of this invention is a process of treating silicon-containing solid material used in a reactor for producing chlorosilanes. The process comprises subjecting the silicon-containing solid material that has been used in a reactor, to a magnetic separator apparatus as set forth herein to separate constituents in the silicon-containing solid material into a magnetic portion and a non-magnetic portion.
30

Still another embodiment of this invention is a process of treating silicon-containing solid material. The process comprises removing silicon-containing solid material from a fluid bed of a fluid bed reactor and subjecting the silicon-containing solid material to a magnetic separator apparatus as set forth herein to separate constituents in
5 the silicon-containing solid material into a magnetic portion and a non-magnetic portion and thereafter, returning the non-magnetic portion of the silicon-containing solid material to a fluid bed of a fluid bed reactor.

Also an embodiment of this invention is a process for the manufacture of chlorosilanes. The process comprise treating silicon-containing solid materials that have
10 been used in a reactor that is used for the manufacture of chlorosilanes, by subjecting the silicon-containing solid materials to a magnetic separator apparatus as set forth herein to separate constituents in the silicon-containing solid material into a magnetic portion and a non-magnetic portion and thereafter, removing the magnetic portion of the silicon-containing solid materials from the reactor.

15 Yet another embodiment of this invention is a process for the preparation of chlorosilanes. The process comprises providing a fluid bed reactor, charging the fluid bed reactor with comminuted silicon, at least one catalyst for a Direct Process reaction, and, at least one promoter for the Direct Process reaction.

Thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed
20 in the reactor allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact and react to produce alkylchlorosilanes at a desired ratio and at a desired rate.

Thereafter, upon a certain increase in the desired ratio or a certain reduction in the desired reaction rate, subject the contents of the fluid bed to a process comprising treating the fluid bed contents by subjecting the fluid bed contents to a magnetic separator
25 apparatus as set forth herein to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and removing the magnetic portion of the fluid bed contents from the process.

Going to yet another embodiment of this invention, there is a process for the preparation of chlorosilanes comprising providing a fluid bed reactor and charging the
30 fluid bed reactor with comminuted silicon, at least one catalyst for a Direct Process reaction, and at least one promoter for the Direct Process reaction.

Thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed in the reactor and allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact and react to produce alkylchlorosilanes at a desired ratio and at a desired rate, and thereafter, upon a certain increase in the desired ratio or a certain reduction in the desired reaction rate, subject the contents of the fluid bed to a process comprising treating the fluid bed contents by comminuting the fluid bed contents to reduce the average particle size of the solids therein and thereafter, subjecting the milled fluid bed contents to a magnetic separator apparatus as set forth herein to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and thereafter, removing the magnetic portion of the fluid bed contents from the process and continuing the Direct Process.

Still further, there is an embodiment of this invention that comprises providing a fluid bed reactor and charging the fluid bed reactor with comminuted silicon, at least one catalyst for a Direct Process reaction, and at least one promoter for the Direct Process reaction, and thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed in the reactor.

Thereafter, allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact and react to produce alkylchlorosilanes at a desired ratio and at a desired rate thereafter, upon a certain increase in the desired ratio or a reduction in the desired reaction rate, subject the contents of the fluid bed to a process comprising treating the fluid bed contents by reducing and removing impurities from the solids portion of the fluid bed contents by subjecting the fluid bed contents to a size classification method using an aerodynamic centrifugal classifier process and thereafter subjecting the purified fluid bed contents to a magnetic separator apparatus as set forth herein to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and removing the magnetic portion of the fluid bed contents from the fluid bed reactor and continuing the Direct Process.

Turning to yet another embodiment of this invention, there is a process for the preparation of chlorosilanes wherein the process comprises providing a fluid bed reactor, charging the fluid bed reactor with comminuted silicon, at least one catalyst for a Direct

Process reaction, and at least one promoter for the Direct Process reaction and thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed in the reactor.

5 Thereafter, allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact and react to produce alkylchlorosilanes at a desired ratio and at a desired rate and thereafter, upon a certain increase in the desired ratio or a reduction in the desired reaction rate, subject the contents of the fluid bed to a process comprising treating the fluid bed contents by comminuting the fluid bed contents to reduce the average particle size of the solids therein and reducing and removing impurities from the milled solids
10 portion of the fluid bed contents by subjecting the fluid bed contents to a size classification method using an aerodynamic centrifugal classifier process and then subjecting the purified fluid bed contents to a magnetic separator apparatus as set forth herein to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and then removing the magnetic portion of the fluid bed contents
15 form the fluid bed of the fluid bed reactor and continuing the Direct Process.

And, finally there is an embodiment of this invention in which there is a process for the preparation of chlorosilanes wherein the process comprises providing a fluid bed reactor and charging the fluid bed reactor with comminuted silicon, at least one catalyst for a Direct Process reaction, and at least one promoter for the Direct Process reaction.

20 Thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed in the reactor and allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact and react to produce alkylchlorosilanes at a desired ratio and at a desired rate and thereafter, upon a certain increase in the desired ratio or a certain reduction in the desired reaction rate, subject the contents of the fluid bed to a process comprising treating
25 the fluid bed contents by abrading the fluid bed contents to remove impurities from the surface of the fluid bed contents particle and thereafter, subjecting the abraded fluid bed contents to a magnetic separator apparatus as set forth herein to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and thereafter, removing the magnetic portion of the fluid bed contents from the process and continuing
30 the Direct Process.

DETAILED DESCRIPTION OF THE INVENTION

With more specificity, the invention disclosed and claimed herein is a magnetic separator apparatus that is useful in separating finely divided solids, that are suspended in or are contacted by liquids, vapors, and gases that are hazardous.

5 Referring now to Figure 1, wherein there is shown a magnetic separator apparatus 1 of this invention mounted on a metal support stand 38, there is also shown a pressure vessel container 2, surmounted by a pressure vessel lid flange 5. Mounted on the pressure vessel lid flange 5 is a first support mechanism 14 that has four legs, but which is illustrated and shown as two legs 39.

10 The first support mechanism 14 has surmounted on its top, a plate 40, which is part of a mechanism for supporting lower springs 18. Supported on the plate 40 is a second support mechanism 17 that also has four legs, but which is illustrated as two legs 41, and mounted on this support mechanism 17 is a magnet vibrator 15 (also shown in Figure 2).

15 Surmounted on the legs 41 is a second set of springs, designated 24. At a point just above the pressure vessel lid flange 5, there is shown a bellows 28, which is mounted on the top 43 of the pressure vessel lid flange 5. For purposes of this invention, the bellows 28 is a true bellows, meaning that it is not just a boot that is used as a cover.

Turning to Figure 2, which is full cross sectional view through line A-A of Figure 1, absent the support stand 72, wherein like numbers denote like components, there is shown the pressure vessel container 2, and the top half 3 of the pressure vessel container 2, along with the lower half 4 of the pressure vessel container 2. Located in the top half 3 there is shown a feed nozzle 9 that is used to feed materials to the pressure vessel container 2.

25 Located in the lower half 4 of the pressure vessel container 2 is a matrix 10 that is supported within the pressure vessel container 2 by a matrix support plate 11. Surrounding the pressure vessel 2, at about the same location as the matrix 10, is a layer of insulation 13 that helps control the temperature of the electromagnet apparatus housing 45 by shielding the housing from the hot pressure vessel container 2. Also within the
30 electromagnetic apparatus housing 45 is the electromagnetic apparatus 12.

Running in a vertical line designated as line G-G in Figure 2, is a unitary vertical shaft 25. The shaft 25 extends upwardly through the matrix plate 11 and the matrix 10, and then upwardly through the center of the pressure vessel container 2, continuing upwardly through the centered opening 7 of the pressure vessel lid flange 5 and the shaft seal 8 located in that centered opening 7, and then through the center of the bellows 28, and then upwardly through the centered opening 47 of the plate 40, through the centered opening 50 of the lower control spring 18, continuing through the centered opening 48 of the magnetic vibrator 15, and finally through the centered opening 49 of the upper control spring 24 and continuing through the centered opening 51 of the plate 52, through which it passes, and then terminating a short distance beyond the plate 52, the plate 52 being used to support the shaft 25 at the top 27. The shaft 25 moves up and down to vibrate the matrix 10 that is connected to the shaft by the plates 10 and 84.

Figure 3A is an enlarged, detailed view of the area designated B on Figure 2 showing the detail of the shaft seal 8. There is shown a support plate 6 held in place with bolts 16 that hold the shaft seal 8 in place. Shown on the outside surface of the shaft 25 at this point is a hard coat surface 21 with a polished surface. Also shown is a circumferential coil spring 22 holding the shaft seal 8 in tension around the shaft 25. In addition, there are vertical coil springs 23 surmounted on the shaft seal 8.

Figure 3B is an enlarged view in perspective of the area C of Figure 3A showing the positioning of the circumferential coil spring 22 around the shaft seal. The shaft seal 8 is preferably a carbon, segmented bushing, and the segment lines can be observed in Figure 3B at 26.

Turning now to Figure 4, which is an enlarged, cross-sectional side view that is a detailed view of the vibrator 15 of this invention, through line H-H of Figure 1, there is shown a conventional vibrator having an AC source 20 with wire leads 30 that supply the energy to drive the vibrator 15. Reference should also be made to Figure 5, which is a top view of the vibrator 15, showing, in this case, a vibrator 15 composed of four vibrator mechanisms 31. It should be noted that each of the mechanisms 31 are configured alike, and each have energy input through an AC source as illustrated at 20 of Figure 4.

Turning now to Figure 6, there is shown a full front view of another embodiment of this invention which is a separator 100, wherein like designations indicate like components as in Figures 1 and 2, showing both the containment bellows 28 and the balance bellows 63 in position, with a feed tube 65 from the balance bellows 63 to the containment bellows 28.

With reference to Figure 7, which is a cross-sectional side view of the separator 100 of Figure 6 through line E-E of Figure 6, minus the feed nozzle 9, wherein there is shown an inlet/outlet 33 from the balance bellows 63, and an inlet/outlet 34 from the containment balance 28 that allows for pressure equalization between the two bellows through the balance tube 65 (not shown in Figure 7, but is shown in Figure 6).

Also shown is a gas inlet 35. It should be noted that there is a small gap or opening 61 around the shaft 25, which allows for the flow of the gas into and out of the bellows.

In the balance bellows 63, the pressure thrust forces are balanced. The primary bellows is the containment bellows 28. The bellows 63 is constructed similar to the bellows 28, and it is located above the upper control spring 24 using a support mechanism that is similar to the support mechanisms used therebelow.

The pressure balance tube 65 provides an open flow of and gas between the balance bellows 63 and the containment bellows 28 so that when the containment bellows 28 is compressed, the balance bellows 63 is extended and vice versa.

As in the vibrating magnetic separator 1 of Figure 1, in this separator, there is shown the pressure vessel containment 2, the top half 3 and the lower half 4 of the pressure vessel containment 2, showing the vertical wall 53 on which the feed nozzle 9 is mounted, the pressure vessel lid flange 5, the centered opening 7 in the pressure vessel lid flange 5, the shaft seal 8 in the centered opening 7, the matrix 10, the matrix support plate 11, the electromagnetic apparatus 12, with the surrounding insulation layer 13 and a first support mechanism 14.

The top of the flange 5 is configured with a platform 75 that is shown as an integral part of the flange 5, which supports the containment bellows 28. The platform 75 has a centered opening 77 in it that allows for the passage of the shaft 25 therethrough.

The upper end of the containment bellows 28 is supported by a flange 73 in the shaft 25 that prevents the bellows 28 from sliding aggressively up the shaft 25 and holds the containment bellows 28 in position.

5 Optionally, the separator 100 can contain a plate 79, supported on the support mechanism 14, that has a centered opening 80, in which is situated a linear bearing 81 for the shaft 25. Just above the plate 79, is the bottom control spring 18, which is held in place by support 66. The bottom control spring 18 has a centered opening 68, which allows for the passage of the shaft 25, and is configured such that there is a flange 82 in the shaft 25 that is coupled to the center of the bottom control spring 18. In this manner, 10 the bottom control spring 18 is enabled to control the vertical movement of the shaft 25.

 Situating just above the bottom control spring 18 is the vibrator 15 that is supported by the support mechanism 17. The shaft 25 contains a flange 83 at this point such that the vibrator 15 can be contacted with the shaft 25 to enable the shaft 25 to be vibrated up and down in the separator. Just above the vibrator 15, is located the top 15 control spring 24. The shaft 25 has an expanded portion 85 at this point to enable the top control spring 24 to control the shaft 25. Just above the top control spring 24, is the top end of the separator 100 in which there is located the balance bellows 63, supported by a flange 55 in the shaft 25. As indicated *Supra*, there is a support 86 for the bellows 63 that prevents the bellows 63 from moving upwardly. In the top end of the balance bellows 63 20 there is located the inlet/outlet 33. Thereafter, there is a top plate 74 to bind the component parts of the separator 100 at the top.

 The unitary moveable vertical shaft 25 has a lower end 54 and an upper end 55 and the unitary moveable vertical shaft 25 is held at its lower end 26 by the matrix plate 11 and a fastener 56. The unitary moveable vertical shaft 25 extends upwardly through the 25 pressure vessel lid flange 5, centered opening 7 and the shaft seal 8 located in the pressure vessel lid flange 5. The shaft 25 then extends upwardly through the center of the containment bellows 28, further extending upwardly through the lower control spring 18 and lower control spring support mechanism, extending upwardly through the magnetic vibrator centered opening 16, extending upwardly through the upper control spring

support mechanism 71 and upper control spring 24, and extending upwardly through the balance bellows 28 and terminating at essentially the lower surface 76 of the top support plate 52.

5 There is an clean gas purge apparatus 77 comprising an clean gas purge inlet 35 located in the pressure vessel lid flange 5, which purge opens into a purge space 62 formed by the shaft seal 8 as the floor, the pressure vessel lid flange 5 as the side and the containment bellows 28 as the top, there being a small opening 61 where the shaft seal 8 meets the unitary vertical shaft 25 to enable the inert gas to flow into the pressure vessel container 2.

10 For purposes of balancing the pressure between the two bellows, there is pressure balancing tube 65, that is openly connected from the containment bellows 28 to the balance bellows 63.

At the bottom of the separator 100, the pressure containment vessel 2 has mounted on its lower half terminus, a discharge cone 36, which discharge cone 36 has a lower end 37, and affixed on the lower end 37 is a controllable discharge nozzle 38.

In operation, and with reference to the first embodiment of this invention, the magnetic separator 1 consists of the matrix 10 that vibrates inside the pressure vessel container 2. The matrix 10 is intermittently magnetized and demagnetized by means of the electromagnetic apparatus 12 that surrounds the matrix 10. The matrix 10 is vibrated by means of the moveable vertical shaft 25 that is connected to the stationary pressure vessel containment 2 by the containment bellows 28. To allow the separator 1 to operate at temperatures above ambient temperature and pressure, the bellows 28 is preferentially constructed of thin flexible metal. To reduce stress on the bellows 28, and to extend the life of the bellows 28, a multi-ply metal bellows 28 is preferred as is shown in Figure 9.

25 Figure 8 is a view of the area D of Figure 7 and Figure 9 is a view of the area E of Figure 7.

Figure 10 is an enlarged Figure and detail of the area F of Figure 8, which is a portion of the balance bellows 63. The Figure shows a portion of the shaft 25, the outer ply 59 and the inner ply 58 of the bellows. There is shown the top flange 44 of the bellows and the lower flange 46 of the bellows, the operation of which is set forth infra.

There is also shown a pressure instrument 39, a pressure measuring chamber 57, and a vacuum valve 60, along with the purge space 62. The containment bellows 28 is constructed in a similar manner, but as can be observed from Figure 9, the pressure instrument 39, the pressure measuring chamber 57, and vacuum valve 60 are shown at the
5 bottom of the bellows.

For purposes of illustration and clarity of operation of the separators, the flanges on the two bellows have been denominated differently. In the balance bellow 63, the top flange is designated 44 and this is the stationary flange, while the bottom flange is designated 46 which is the flexing flange and the flange that moves when the bellows
10 expands and contracts.

Likewise, in Figure 9, the containment bellows is illustrated as shown in area E of Figure 7 wherein the top flange is designated 70 and is the flexing flange, while the bottom flange is designated 71 and is the stationary flange and operates the same as the balance bellows 28.

15 A multi-ply metal bellows 28 also allows the integrity of the bellows 28 to be tested continuously for failure. What is meant by "multi-ply" is at least two walls. The bellows 28 is preferably a corrugated tube design as is shown in the Figures. The walls of the multi-ply bellows 28 are concentric. A pressure-sensing chamber 57 as shown in Figure 10 is created between the two adjacent plies 58 and 59 of the bellows. This
20 chamber can be evacuated by means of the valve 60 that has been connected to a vacuum pump (not shown). The pressure in the chamber 57 can then be read directly from the pressure instrument 39. This pressure instrument 39 can be a locally mounted pressure gauge as illustrated herein, but preferably, it is an electronic pressure sensor that is connected to a control system such as a programmable logic controller or distributed
25 control system with an alarm to alert the operator immediately in case either of the bellows fail. The pressure sensing chamber 57 can also be pressurized or evacuated, but the pressure must be different than either the external ambient pressure or the pressure inside the pressure vessel containment 2. In the case of a magnetic separator operating above ambient pressure, the chamber 57 is preferentially evacuated so that failures,
30 cracks or leaks in the outer ply 59 of the bellows or the inner ply 58 of the bellows are detected when the pressure in the sensing chamber 57 rises above a predetermined

vacuum alarm point. If the pressure vessel containment 2 is operating under vacuum, it may be desirable to pressurize the inter-ply pressure-sensing chamber 57. In this case, additional stiffness in the bellows due to the pressure between the plies must be considered in designing the bellows. Preferably, the bellows is welded into place to
5 achieve a vacuum-tight system.

With regard to the second embodiment of this invention, wherein a second bellows, the balance bellows 63, is used as shown in Figure 6, the pressure thrust forces are balanced between the use of both of the bellows. The containment bellows 28 is balanced with the balance bellows 63, and the bellows 63 is installed near the magnet
10 vibrator drive 15. When the containment bellows 28 is compressed, the balance bellows 63 is extended and vice versa. In the first embodiment, high pressure in the pressure vessel containment 2 acts on the pressure vessel lid flange 5 creating an upward force. If the pressure is high or if the area of the pressure vessel lid flange 5 is significant, the resulting force can be considerable. The pressure vessel containment 2 pressure also acts
15 on the cross sectional area of the vertical moveable shaft 25. Additional pressure force can result from a purge of clean gas on the shaft seal. In the second embodiment, a pressure balance tube 65 creates an equal pressure on the balance bellows 63 with an equal downward force. The upward force of the containment bellows 28 and the downward force of the balance bellows 63 cancel each other. This decreases the load on
20 the vibrator 15 and the springs 18 and 24. The balanced bellows design is particularly suited for variable pressures in the pressure vessel containment 2.

The vibrating assembly per se consists essentially of the vertical moveable shaft 25 and the matrix 10. The vertical moveable shaft 25 is suspended on multiple springs 18 and 24. Coil springs can be used, but to limit lateral deflections, these springs are
25 preferably leaf springs so that the lateral deflections can be controlled to prolong the life of the bellows, in other words, the lateral deflections should be limited as much as is possible. Leaf springs improve deflection control. The springs 18, 24, for example, can be made of any suitable material such as steel or glass reinforced plastic. Multiple springs can be used at both the top and the bottom locations in the stacks. To minimize lateral
30 deflections, the stacks of leaf springs can be rotated ninety degrees in orientation.

The vertical moveable shaft 25 is vibrated vertically by means of the linear "E-frame" vibrator 15. The E-frame vibrator 15 is connected to an alternating current source that creates oscillating vertical vibration according to the frequency of the alternating current source.

5 An purge, which can be inert or not, can optionally be applied to reduce the risk of premature failure of the thin-walled bellows due to erosion damage from abrasive powders. In addition to erosion, solids in the bellows area can fill the bellows so that it is packed with solids and therefore inflexible. The purge can also prevent condensation of vapors that are handled above their boiling point in the pressure vessel. This purge is
10 shown detail in Figure 10. In this case, a clean gas or some other suitable fluid flows through a purge pipe inlet 35 into a purge space 62 above the pressure vessel containment 2. The upper flange 70 of the bellows 28 encloses the top of the purge space 62. The lower end of the purge space 62 is open to the pressure vessel containment 2. To limit lateral movement of the vertical shaft 25, the purge space 62 is machined into the
15 pressure vessel lid flange 5 and the space is fitted with a shaft seal 8 that is pressed into a ledge in the pressure vessel lid flange 5. The shaft seal 8 is shaped like a washer. It is made of a material of construction that is distinctly harder or softer than the vertical shaft 25 so that one component is preferentially worn and replaced with respect to the other. The shaft seal 8 can be a single piece washer or a segmented bushing. The preferred
20 design is a graphite shaft seal and an alloy shaft. Harder shaft seals 8 made of silicon carbide or similar ceramics are also possible. The shaft seal 8 prevents ingress of fine, abrasive particles. It also provides a preferential wear point so that that inexpensive shaft seal 8 can be replaced instead of a more difficult repair of the pressure vessel lid flange 5. The shaft seal 8 can be fitted from above as shown in Figure 1, or alternatively, it can be
25 fitted from below and held in place with a small plate that is bolted into the pressure vessel lid flange 5 from underneath.

The matrix 10 is fixed to the vibrating shaft 25 by means of upper and lower plates 11 and 84, respectively, that are clamped to the vertical moveable shaft 25. Many types of matrices 10 are possible such as screens, perforated plates, expanded metal mesh

or even steel wool. The preferred matrix 10 is a partially opened disk such as an expanded metal mesh. The matrix 10 is made from magnetically soft steels such as, for example, 430 stainless steel or 410 stainless steel.

5 The matrix 10 is alternatively magnetized and demagnetized by an external electromagnetic apparatus 12 such as a solenoid, and the solenoid is housed in a housing 45. The housing 45 is filled with oil 87 (Figure 2) that is cooled externally by means of a circulation system not shown and not part of the claimed invention.

10 If the pressure vessel containment 2 is to operate significantly above ambient temperature, it is desirable to fit the unit with thermal insulation 13. This prevents the housing 45 from overheating so that the solenoid 12 resistance increases and causes reduced magnetic field strength. Preferred materials of construction for the pressure vessel containment 2 and the vertical moveable shaft 25 are steels such as 304 and 316 stainless steels. These steels are not significantly magnetized by the solenoid 12. To improve wear resistance, hard coating 21 can be applied to the containment vessel 2, 15 shaft 25, and other components.

Powder containing magnetic particles is fed through feed nozzle 9. Multiple nozzles may be provided to equalize flow to different sides of the vessel. If the feed powder is especially abrasive, it is desirable to insert feed pipes through the nozzles so that pipes can be replaced without significant repair to the pressure vessel. If the pressure 20 vessel containment 2 is a large diameter vessel, it may be desirable to provide a steep discharge cone 36 to limit the size of the downstream collection and transfer piping.

To process a batch of feed powder, the solenoid 12 is first energized to magnetize the matrix 10. Then, a volume of powder is fed through the feed nozzle 9 onto the top of the matrix 10. The feed powder flows through the matrix plates 10 aided by the vibrator 25 15. Magnetic particles are attracted to the matrix 10. Non-magnetic particles pass through the matrix 10 and discharge through the discharge nozzle 38.

After non-magnetic particles are removed from the separator, a diverter valve below the separator (not shown) is switched to direct flow to a different piping route. Then, the solenoid 12 is de-energized. With the vibrator 15 still operating, the magnetic 30 fines are released from the matrix 10 and exit the discharge nozzle 38.

Suitable materials of construction for the metal bellows 28 and 63 are austenitic stainless steels such as 316 stainless steel or high nickel alloys such as Inconel 625. The materials of construction for the inner ply bellows 58 must be compatible with the contents of the magnetic separators. The materials of construction for the outer ply 59 of the bellows 28 and 63 must be compatible with the external environment and weather, if the separators are located outdoors.

10

15

20

25

30

What is claimed is:

1. A vibrating magnetic separator having vibrating components and stationary components wherein the vibrating magnetic separator contains a flexible bellows to isolate the vibrating components from the stationary components.

5

10

15

20

25

30

2. A vibrating magnetic separator comprising in combination:
- A. an electromagnet;
 - B. a pressure vessel having an inlet and an outlet, said pressure vessel being mounted in the electromagnet;
 - 5 C. a ferromagnetic matrix;
 - D. a vibrator for vibrating the ferromagnetic matrix said vibrator moving in a vertical direction, and
 - E. a bellows that connects the stationary components of the magnetic separator to the vibrating components of the magnetic separator.
- 10 3. The vibrating magnetic separator as claimed in claim 2 wherein the means of applying vibration to the matrix is a moveable shaft connecting the vibrator and the matrix.
4. A vibrating magnetic separator as claimed in claim 2 wherein the flexible bellows is a metal bellows that is useful above ambient temperature and pressure.
- 15 5. A vibrating magnetic separator as claimed in claim 2 wherein the flexible bellows has at least two plies.
6. A vibrating magnetic separator as claimed in claim 2 wherein there is present between two of the plies, failure detection means.
7. A vibrating magnetic separator as claimed in claim 1 wherein there is present at least one linear magnetic vibrator
- 20 8. A vibrating magnetic separator as claimed in claim 2 wherein there is present at least one linear magnetic vibrator.
9. A magnetic separator apparatus comprising in combination:
- a. a pressure vessel container having a top half, a lower half, and a lower half terminus, said pressure vessel container being surmounted by a pressure vessel lid flange said pressure vessel container having a vertical wall, said pressure vessel lid flange having a centered opening therethrough wherein there is a shaft seal located in said centered opening;
 - 25 b. at least one feed nozzle mounted on the pressure vessel container for feeding material to the pressure vessel container;
- 30

- 5
- 10
- 15
- 20
- 25
- c. a matrix located in the lower half of the pressure vessel container, said matrix being supported in the pressure vessel container by a matrix plate;
 - d. an electromagnetic apparatus encircling the pressure vessel container on the outside of the pressure vessel container wall, and at the location of the matrix, a layer of thermal insulation located between said electromagnetic apparatus and the pressure vessel container wall;
 - e. a first support mechanism mounted on the pressure vessel lid flange for supporting a vibrator mounting frame, said vibrator mounting frame having a centered opening therethrough;
 - f. a second support mechanism surmounted on the vibrator mounting frame for supporting at least one lower control spring and lower control spring support mechanism, said second support mechanism also supporting a magnet vibrator casing containing a magnet vibrator, said magnet vibrator and magnet vibrator casing having centered openings therethrough, and surmounted on the magnet vibrator casing, a third support mechanism, there being mounted on said third support mechanism a support plate having surmounted thereon a fourth support mechanism, there being supported on the fourth support mechanism, at least one upper control spring having an upper surface;
 - g. a unitary moveable vertical shaft having a lower end and an upper end, said unitary moveable vertical shaft being held at its lower end by the matrix plate, said unitary moveable vertical shaft extending upwardly through the pressure vessel lid flange centered opening and the shaft seal located in the pressure vessel lid flange, extending upwardly through the center of a bellows, extending upwardly through the vibrator mounting frame centered opening, extending upwardly through the lower control spring, extending upwardly through the magnet vibrator centered opening, extending upwardly through the upper control spring, and terminating at essentially the upper surface of the upper control spring;

- h. said bellows being surmounted on the pressure vessel lid flange and being supported by a bellows upper support mechanism that surrounds the unitary moveable vertical shaft;
- 5 i. an clean gas purge apparatus comprising an clean gas purge inlet located in the pressure vessel lid flange, which purge opens into a purge space formed by the shaft seal as the floor, the pressure vessel lid flange as the side and the bellows as the top, there being a small opening where the shaft seal meets the unitary vertical shaft to enable the inert gas to flow into the pressure vessel container;
- 10 j. the pressure vessel lid flange having mounted on the lower half terminus, a discharge cone, said discharge cone having a lower end, there being mounted on the lower end of the discharge cone, a controllable discharge nozzle.
10. A magnetic separator apparatus comprising in combination:
- 15 (i) a pressure vessel container having a top half, a lower half, and a lower half terminus, said pressure vessel container being surmounted by a pressure vessel lid flange said pressure vessel container having a vertical wall, said pressure vessel lid flange having a centered opening therethrough wherein there is a shaft seal located in said centered opening;
- 20 (ii) at least one feed nozzle mounted on the pressure vessel container for feeding material to the pressure vessel container;
- (iii) a matrix located in the lower half of the pressure vessel container, said matrix being supported in the pressure vessel container by a matrix plate;
- 25 (iv) an electromagnetic apparatus encircling the pressure vessel container on the outside of the pressure vessel container wall, and essentially at the location of the matrix;
- (v) a layer of thermal insulation located between said electromagnetic apparatus and the pressure vessel container wall;
- 30 (vi) a first support mechanism mounted on the pressure vessel lid flange for supporting at least one lower control spring support mechanism and lower control spring;

- (vii) a second support mechanism surmounted on the lower control spring support mechanism, said second support mechanism supporting a magnet vibrator casing containing a magnet vibrator, said magnet vibrator and magnet vibrator casing having centered openings therethrough; and surmounted on the magnet vibrator casing, a third support mechanism, there being mounted on said third support mechanism at least one upper control spring support mechanism and at least one upper control spring;
- (viii)) a containment bellows being surmounted on the pressure vessel lid flange and being supported by an upper support mechanism that surrounds a unitary moveable vertical shaft;
- (ix) a fourth support mechanism surmounted on the upper control spring support mechanism, said fourth support mechanism being surmounted by a top support plate, said top support plate supporting a balance bellows, said balance bellows being supported by a lower support mechanism that surrounds the unitary moveable vertical shaft;
- (x) the unitary moveable vertical shaft having a lower end and an upper end, said unitary moveable vertical shaft being held at its lower end by the matrix plate, said unitary moveable vertical shaft extending upwardly through the pressure vessel lid flange centered opening and the shaft seal located in the pressure vessel lid flange, extending upwardly through the center of the containment bellows, extending upwardly through the lower control spring and lower control spring support mechanism, extending upwardly through the magnet vibrator centered opening, extending upwardly through the upper control spring support mechanism and upper control spring, and extending upwardly through the balance bellows and terminating at essentially the lower surface of the top support plate;
- (xii) a clean gas purge apparatus comprising a clean gas purge inlet located in the pressure vessel lid flange, which purge opens into a purge space formed by the shaft seal as the floor, the pressure vessel lid flange as the side and the containment bellows as the top, there being a small opening where the shaft

seal meets the unitary vertical shaft to enable the clean gas to flow into the pressure vessel container;

(xiii) a pressure balancing tube, said pressure balancing tube being openly connected from the containment bellows to the balance bellows;

5 (xiv) the pressure vessel lid flange having mounted on the lower half terminus, a discharge cone, said discharge cone having a lower end, there being mounted on the lower end of the discharge cone, a discharge nozzle.

11. A process of treating silicon-containing solid material used in a reactor for producing chlorosilanes, the process comprising subjecting the silicon-containing solid
10 material that has been used in said reactor, to a magnetic separator apparatus as claimed in claim 2 to separate constituents in the silicon-containing solid material into a magnetic portion and a non-magnetic portion.

12. A process of treating silicon-containing solid material, the process comprising:

15 (I) removing silicon-containing solid material from a fluid bed of a fluid bed reactor;

(II) subjecting the silicon-containing solid material to a magnetic separator apparatus as claimed in claim 2 to separate constituents in the silicon-containing solid material into a magnetic portion and a non-magnetic portion;

20 (III) returning the non-magnetic portion of the silicon-containing solid material to a fluid bed of a fluid bed reactor.

13. A process for the manufacture of chlorosilanes, said process comprising:

25 (I) treating silicon-containing solid materials that have been used in a reactor that is used for the manufacture of chlorosilanes by subjecting the silicon-containing solid materials to a magnetic separator apparatus as claimed in claim 2 to separate constituents in the silicon-containing solid material into a magnetic portion and a non-magnetic portion and

(II) removing the magnetic portion of the silicon-containing solid materials from the reactor.

14. A process for the preparation of chlorosilanes, the process comprising:

30 (I) providing a fluid bed reactor;
(II) charging the fluid bed reactor with


- (i) comminuted silicon;
 - (ii) at least one catalyst for a Direct Process reaction;
 - (iii) at least one promoter for the Direct Process reaction;
- 5 (III) thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed in the reactor;
- (IV) allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact and react to produce alkylchlorosilanes at a desired ratio and at a desired rate;
- (V) thereafter, upon a certain increase in the desired ratio or a certain reduction in the
- 10 desired reaction rate, subjecting the contents of the fluid bed to a process comprising treating the fluid bed contents by subjecting the fluid bed contents to a magnetic separator apparatus as claimed in claim 2 to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and removing the magnetic portion of the fluid bed contents from the process.
- 15 15. A process for the preparation of chlorosilanes, the process comprising:
- (I) providing a fluid bed reactor;
- (II) charging the fluid bed reactor with
- (i) comminuted silicon;
 - (ii) at least one catalyst for a Direct Process reaction;
 - (iii) at least one promoter for the Direct Process reaction;
- 20 (III) thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed in the reactor;
- (IV) allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact and react to produce alkylchlorosilanes at a desired ratio and at a desired rate;
- (V) thereafter, upon a certain increase in the desired ratio or a certain reduction in the
- 25 desired reaction rate, subject the contents of the fluid bed to a process comprising treating the fluid bed contents by comminuting the fluid bed contents to reduce the average particle size of the solids therein and thereafter, subjecting the milled fluid bed contents to a magnetic separator apparatus as claimed in claim 2 to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and thereafter,
- 30 removing the magnetic portion of the fluid bed contents from the process and continuing the Direct Process.


16. A process for the preparation of chlorosilanes, the process comprising:
- (I) providing a fluid bed reactor;
 - (II) charging the fluid bed reactor with
 - (i) comminuted silicon;
 - 5 (ii) at least one catalyst for a Direct Process reaction;
 - (iii) at least one promoter for the Direct Process reaction;
 - (III) thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed in the reactor;
 - (IV) allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact
 - 10 and react to produce alkylchlorosilanes at a desired ratio and at a desired rate;
 - (V) thereafter, upon a certain increase in the desired ratio or a reduction in the desired reaction rate, subject the contents of the fluid bed to a process comprising treating the fluid bed contents by reducing and removing impurities from the solids portion of the fluid bed contents by subjecting the fluid bed contents to a size classification method
 - 15 using an aerodynamic centrifugal classifier process and thereafter subjecting the purified fluid bed contents to a magnetic separator apparatus as claimed in claim 1 to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and removing the magnetic portion of the fluid bed contents from the fluid bed reactor and continuing the Direct Process.
- 20 17. A process for the preparation of chlorosilanes, the process comprising:
- (I) providing a fluid bed reactor;
 - (II) charging the fluid bed reactor with
 - (i) comminuted silicon;
 - (ii) at least one catalyst for a Direct Process reaction;
 - 25 (iii) at least one promoter for the Direct Process reaction;
 - (III) thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed in the reactor;
 - (IV) allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact and react to produce alkylchlorosilanes at a desired ratio and at a desired rate;
 - 30 (V) thereafter, upon a certain increase in the desired ratio or a reduction in the desired reaction rate, subject the contents of the fluid bed to a process comprising treating the

- fluid bed contents by comminuting the fluid bed contents to reduce the average particle size of the solids therein and reducing and removing impurities from the milled solids portion of the fluid bed contents by subjecting the fluid bed contents to a size classification method using an aerodynamic centrifugal classifier process and then
- 5 subjecting the purified fluid bed contents to a magnetic separator apparatus as claimed in claim 1 to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and then removing the magnetic portion of the fluid bed contents form the fluid bed of the fluid bed reactor and continuing the Direct Process.
18. A process for the preparation of chlorosilanes, the process comprising:
- 10 (I) providing a fluid bed reactor;
- (II) charging the fluid bed reactor with
- (i) comminuted silicon;
- (ii) at least one catalyst for a Direct Process reaction;
- (iii) at least one promoter for the Direct Process reaction;
- 15 (III) thereafter, providing an alkyl chloride to the fluid bed reactor to form a fluid bed in the reactor;
- (IV) allowing the comminuted silicon, catalyst, promoter and alkyl chloride to interact and react to produce alkylchlorosilanes at a desired ratio and at a desired rate;
- (V) thereafter, upon a certain increase in the desired ratio or a certain reduction in the
- 20 desired reaction rate, subject the contents of the fluid bed to a process comprising treating the fluid bed contents by abrading the fluid bed contents to remove impurities from the surface of the fluid bed contents particle and thereafter, subjecting the abraded fluid bed contents to a magnetic separator apparatus as claimed in claim 1 to separate constituents in the fluid bed contents into a magnetic portion and a non-magnetic portion and
- 25 thereafter, removing the magnetic portion of the fluid bed contents form the process and continuing the Direct Process.

ABSTRACT

Magnetic separator devices that are useful in separating finely divided solids in the presence of liquids, vapors, and gases that are hazardous, that is, they may be corrosive, flammable, toxic, or a combination of such hazards, and the use of such devices in
5 processes for the manufacture of chlorosilanes.

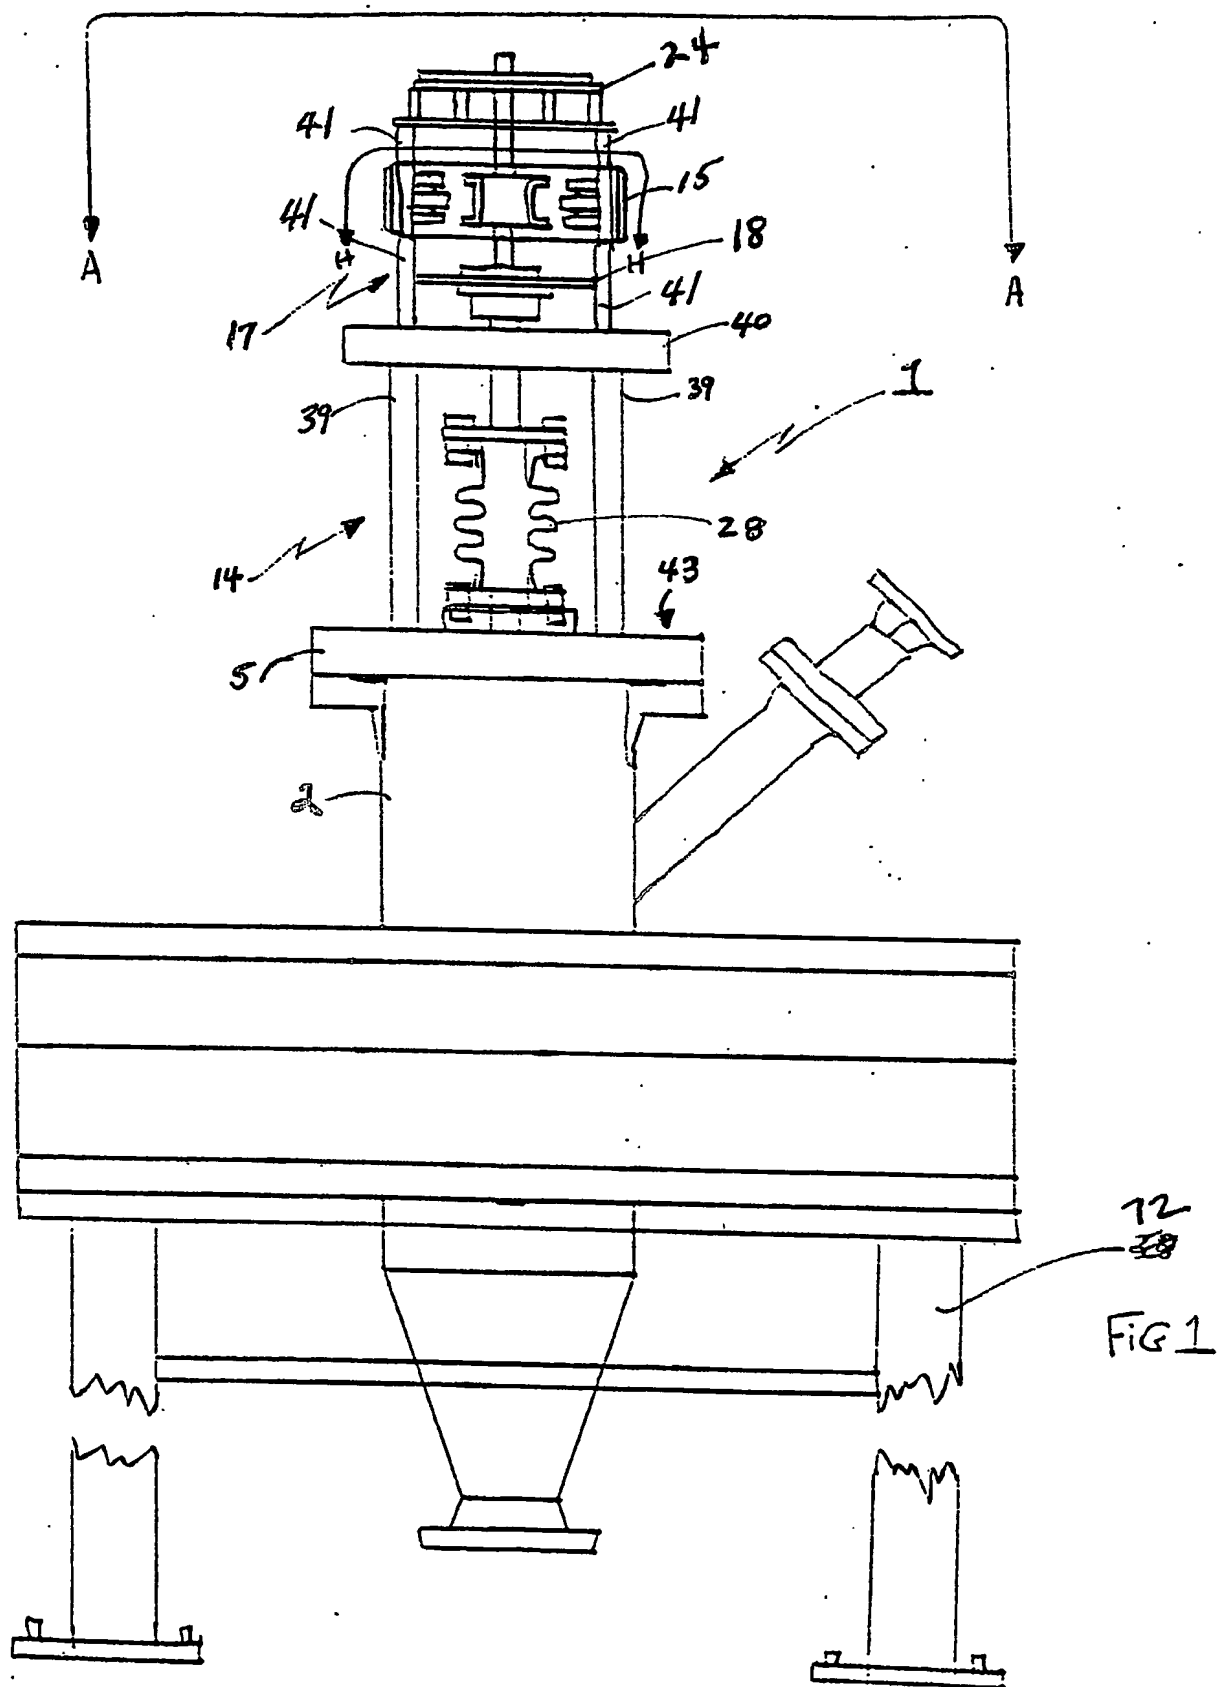

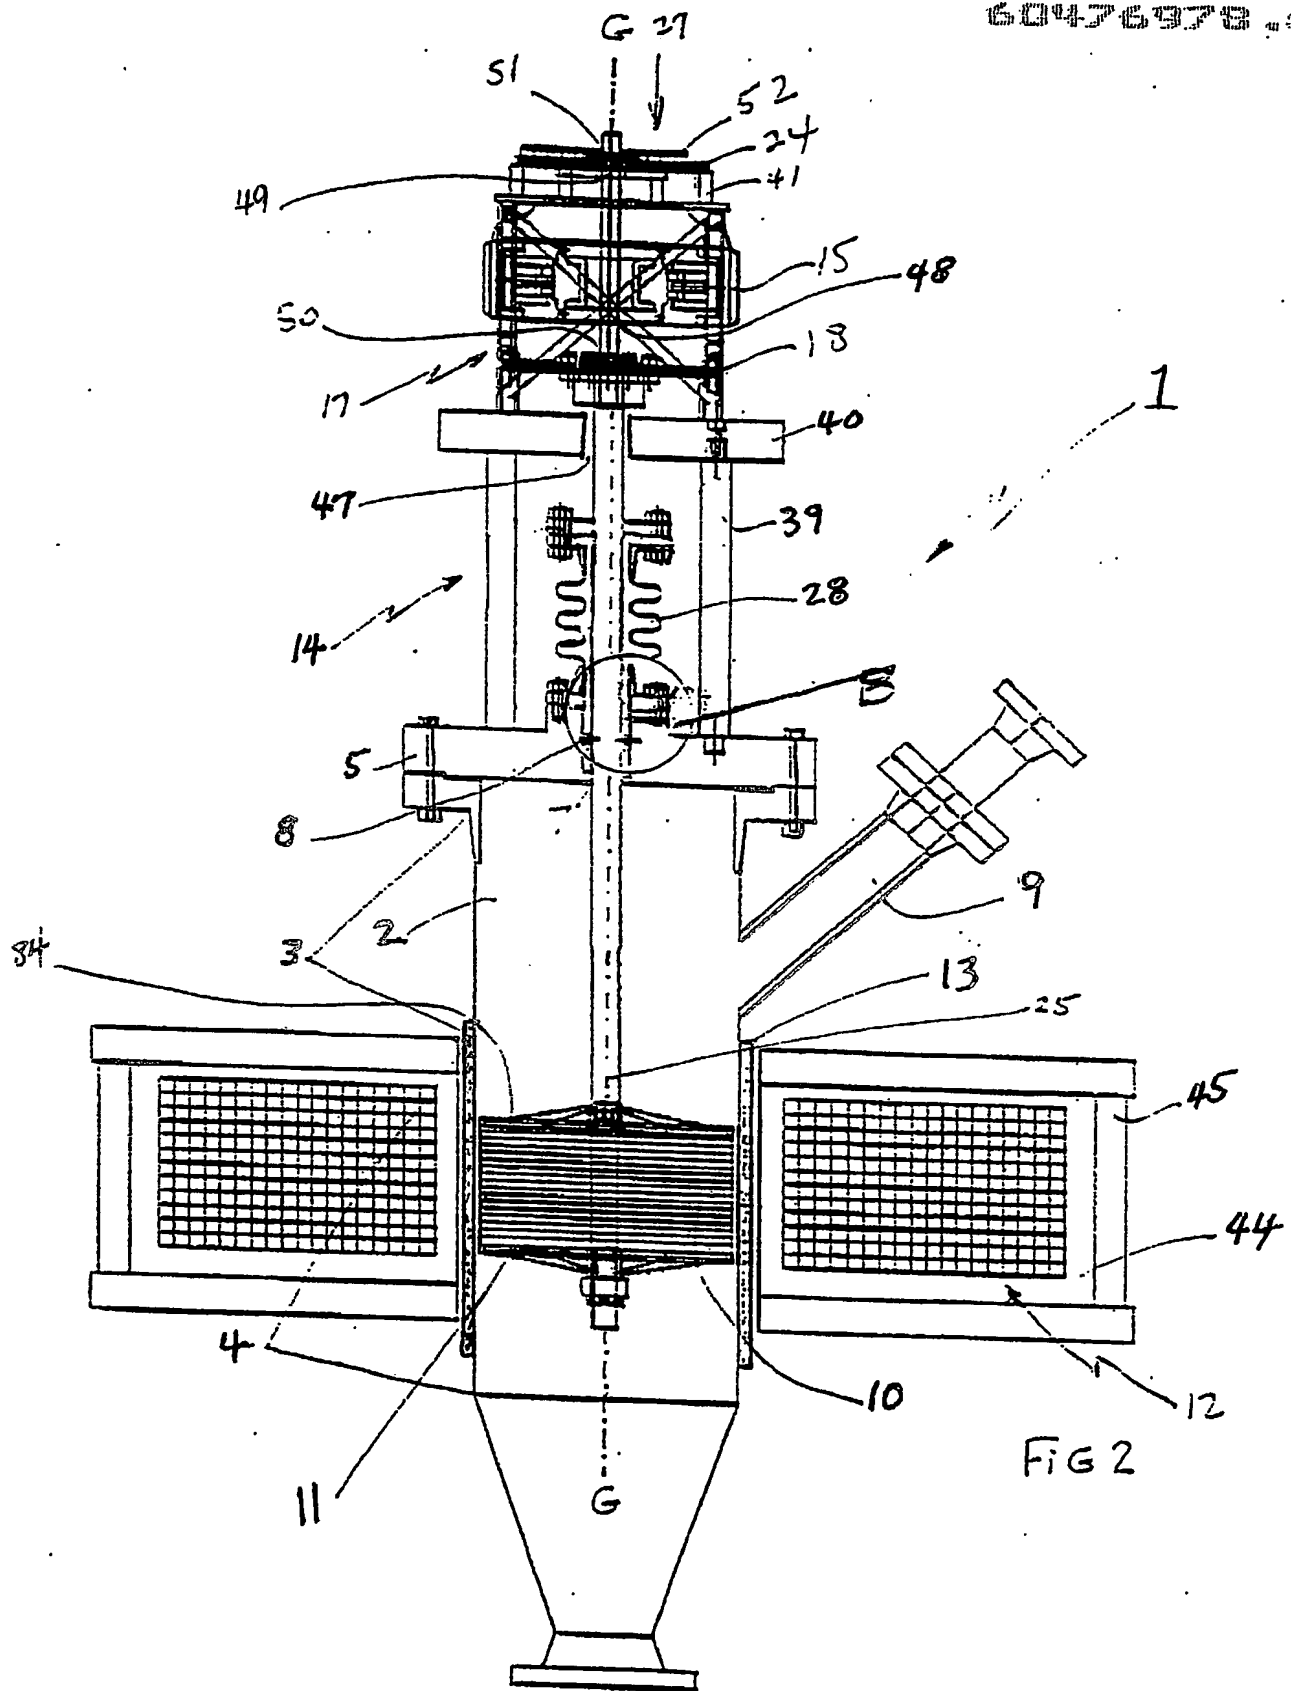

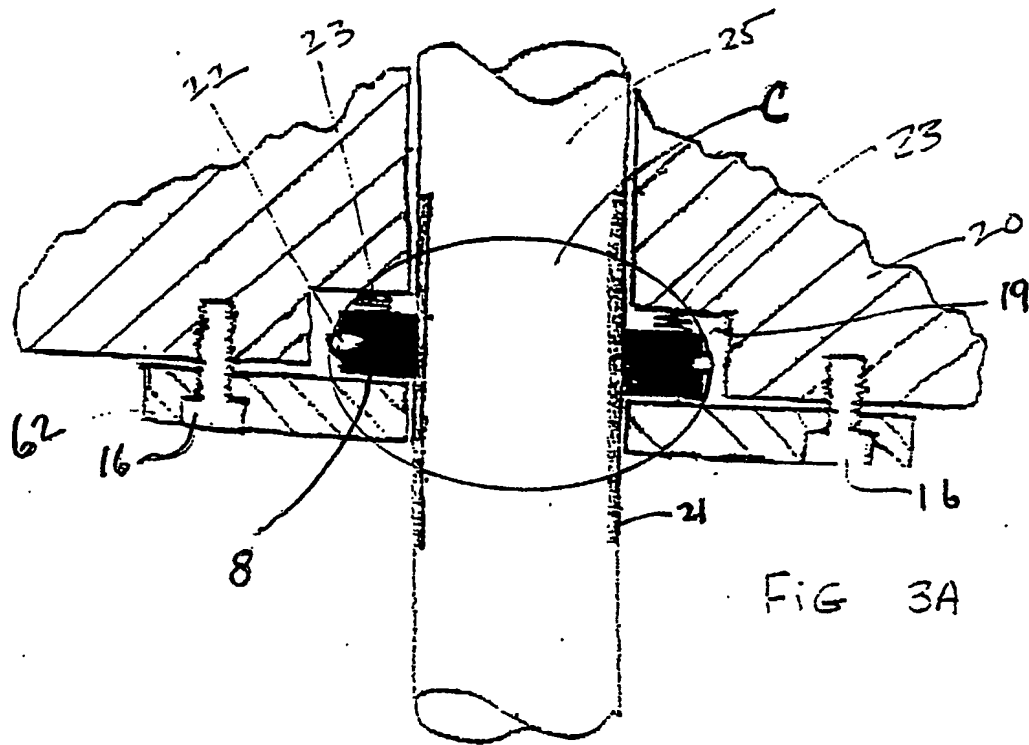


FIG 3A

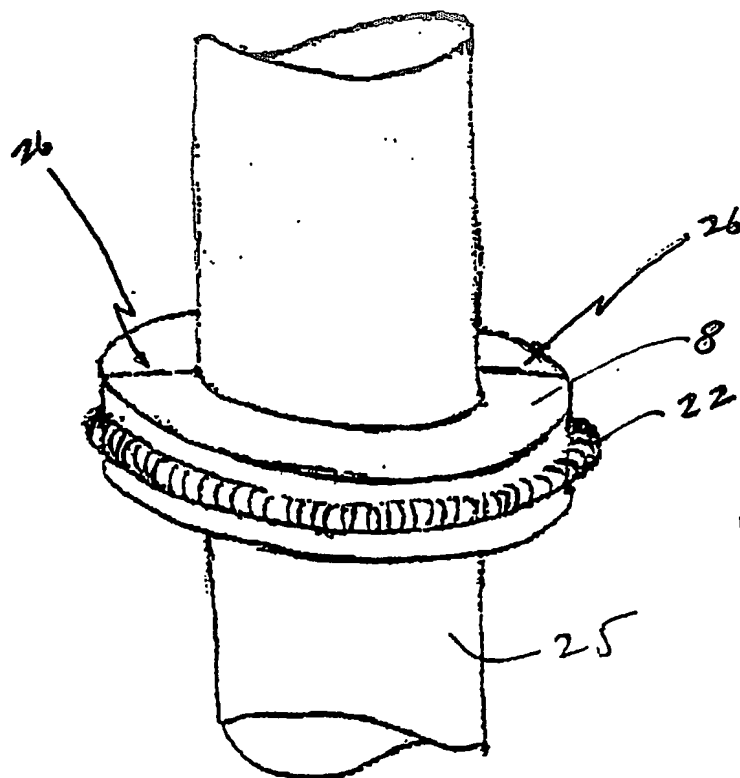


FIG 3B

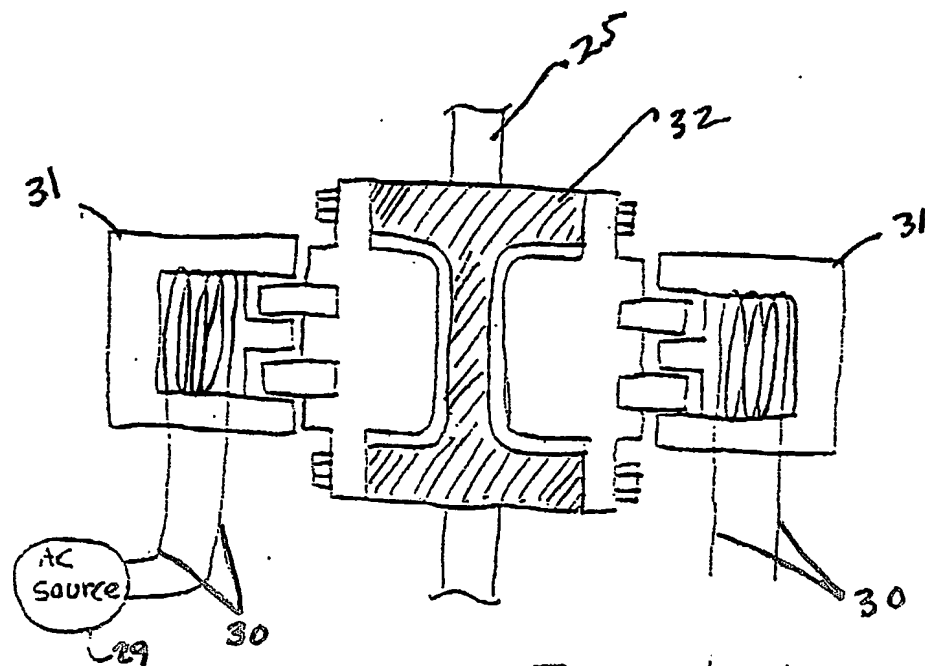


FIG. 4

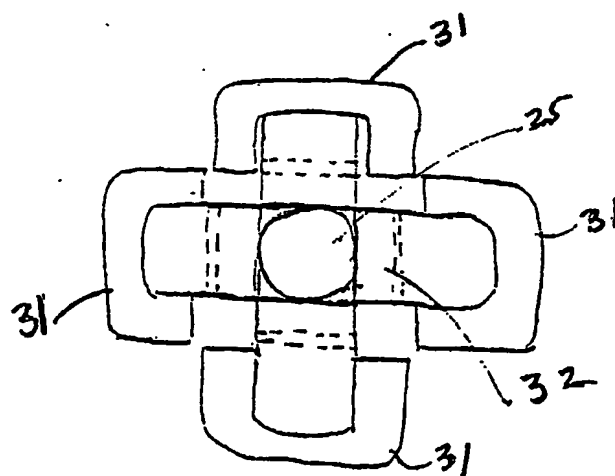
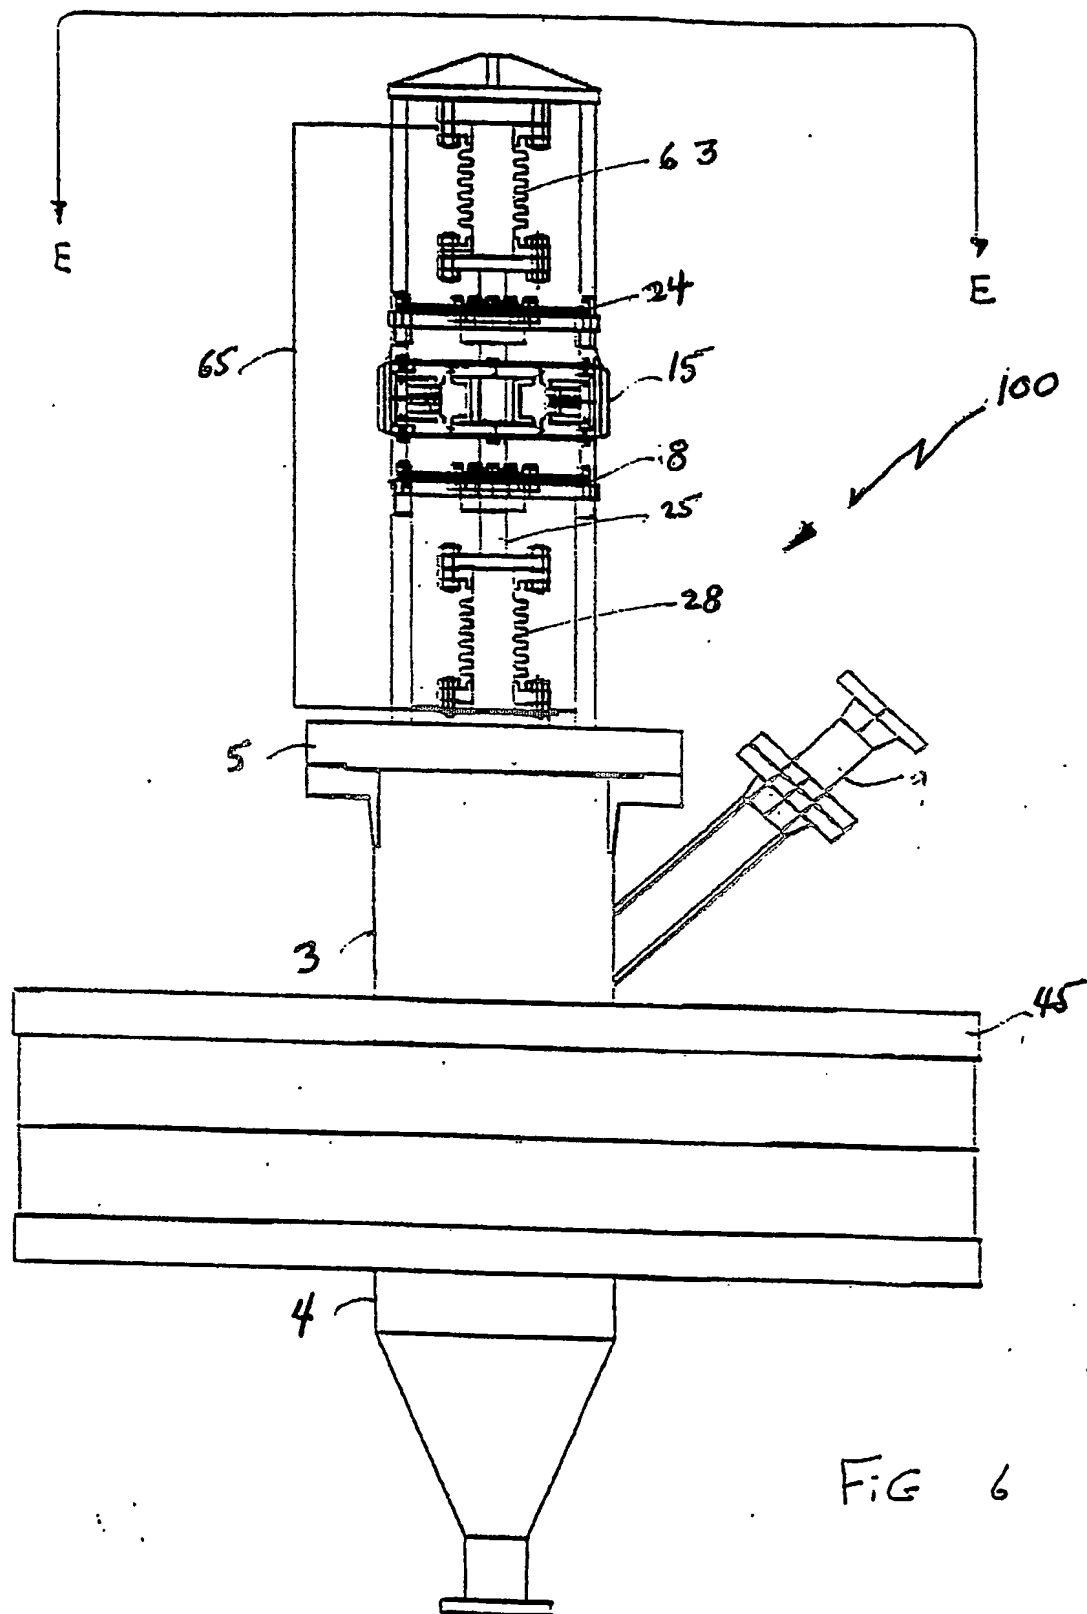
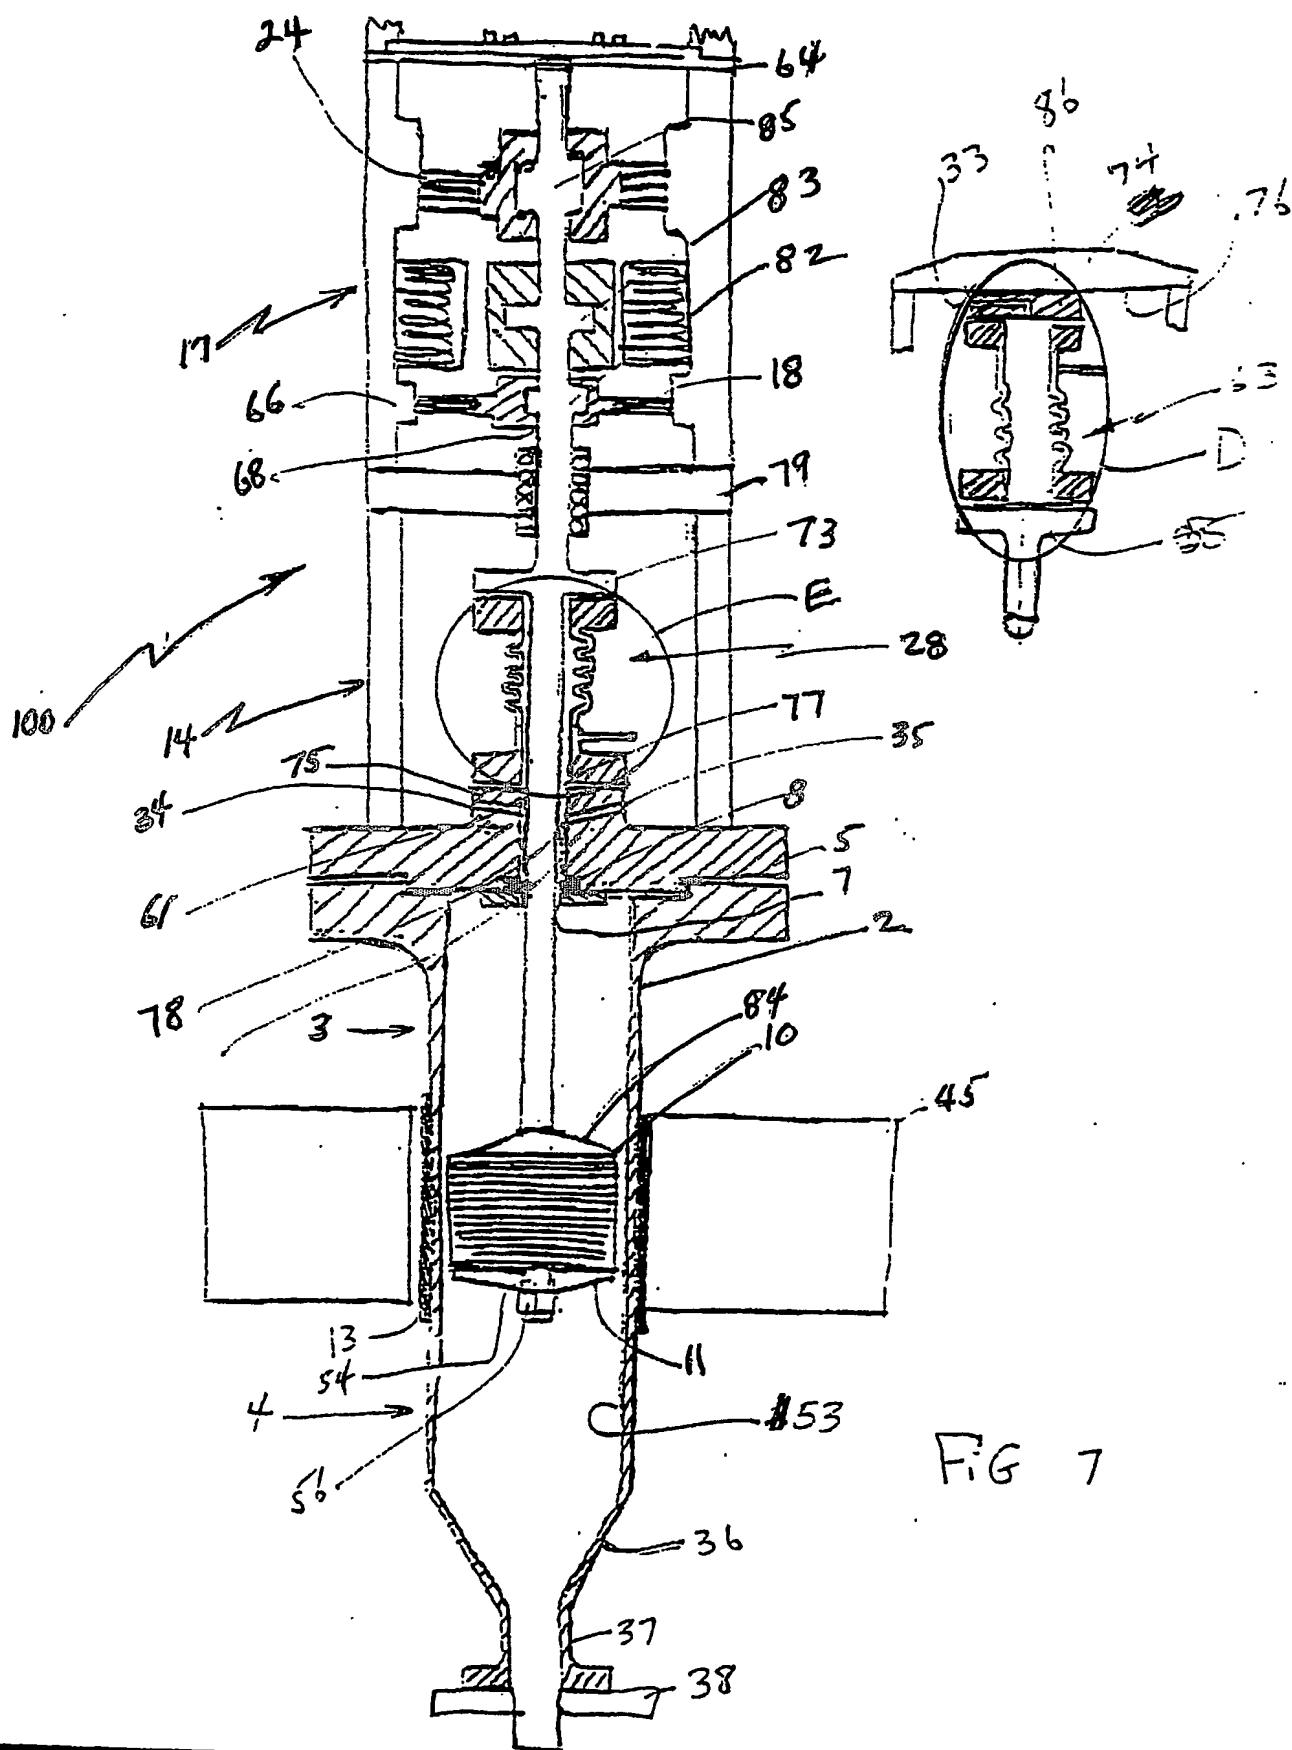
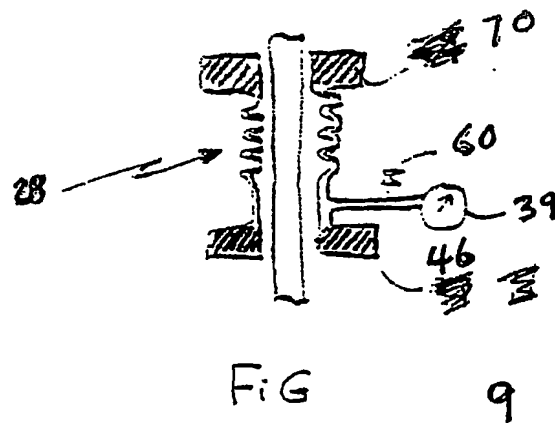
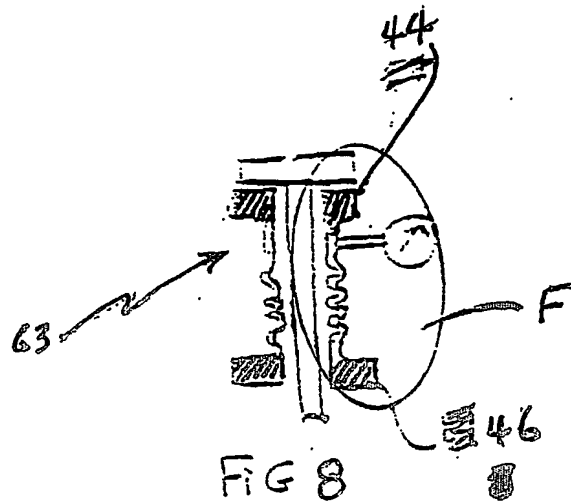


FIG. 5







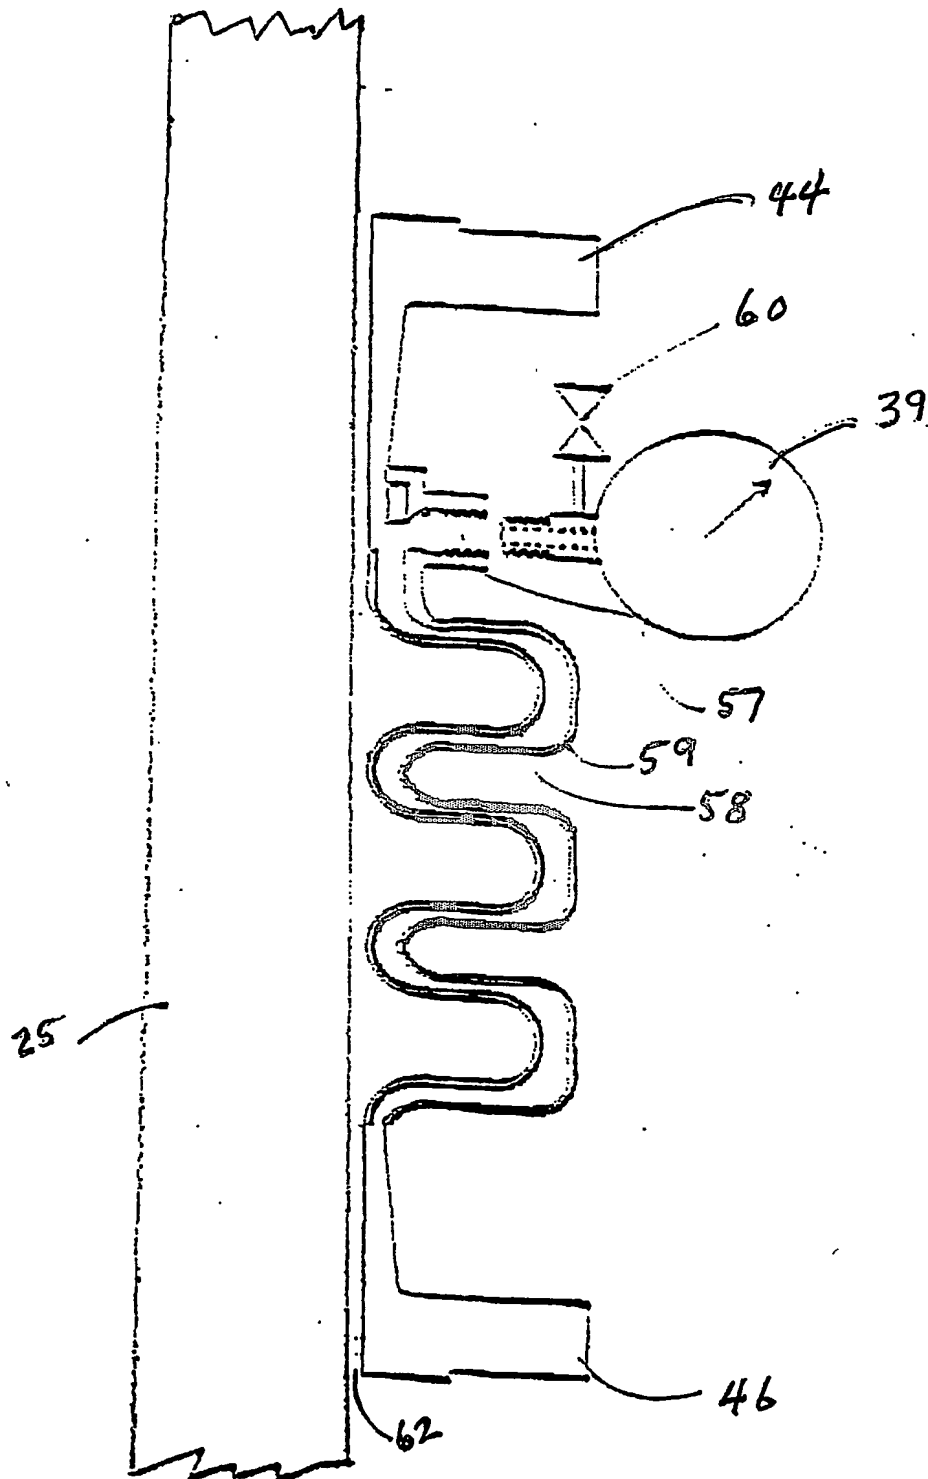


FIG 10

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.